

ROCK BUCKETS


R66 | R75 | R84

SPECIFICATIONS

- Rock buckets are ideal for sifting and sorting material, clearing stone from farm fields, and removing debris from jobsites. Buckets retain rock and debris while digging.
- Tine tips are fully gusseted on both sides for added durability and dependability, and are interconnected for increased strength.



 These rock buckets are optimized to work with John Deere skid steer loaders (SSLs) and compact track loaders (CTLs). They're also compatible with many competitive models.

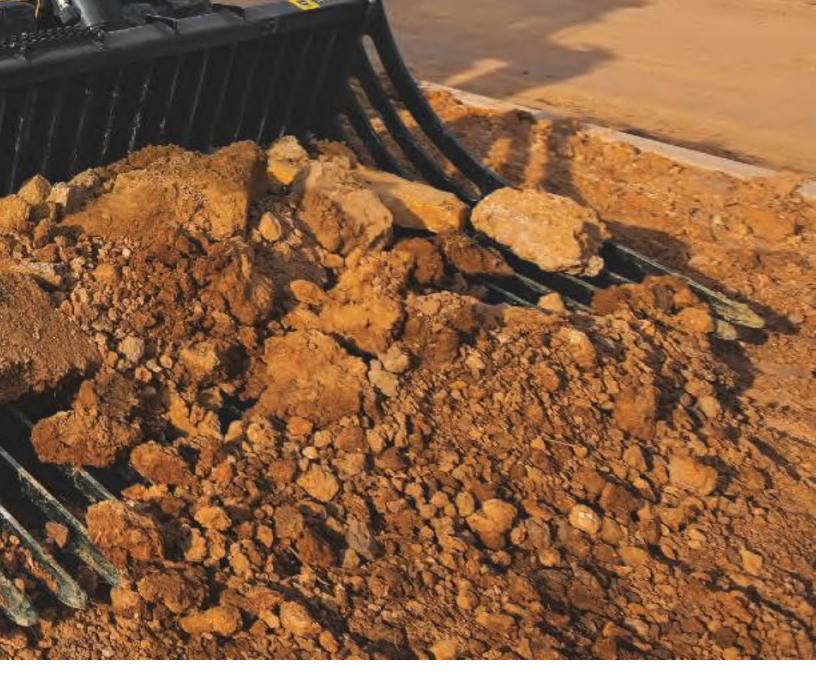

	R66	R75	R84
Width	1727 mm (68 in.)	1900 mm (74.8 in.)	2068 mm (81.4 in.)
Weight	272 kg (600 lb.)	295 kg (650 lb.)	340 kg (750 lb.)
Height	640 mm (25.2 in.)	640 mm (25.2 in.)	640 mm (25.2 in.)
Length	1123 mm (44.2 in.)	1123 mm (44.2 in.)	1123 mm (44.2 in.)
Tine			
Spacing	76 mm (3 in.)	76 mm (3 in.)	76 mm (3 in.)
Thickness	9.5 mm (¾ in.)	9.5 mm (% in.)	9.5 mm (% in.)
Vehicle Compatibility	316GR, 318G, 320G, and 324G SSLs; 317G CTL	320G, 324G, 330G, and 332G SSLs; 317G, 325G, 331G, and 333G CTLs	320G, 324G, 330G, and 332G SSLs; 325G, 331G, and 333G CTLs